

VEU Series

Features

- 4 ϕ ~ 18 ϕ , 105°C, 3,000 ~ 5,000 hours assured
- Long life assured
- Designed for surface mounting on high density PC board
- RoHS Compliance



Marking color: Black

Specifications

Items	Performance																																											
Category Temperature Range	6.3 ~ 100V					160 ~ 400V					450V																																	
	-55℃ ~ +105℃					-40℃ ~ +105℃					-25℃ ~ +105℃																																	
Capacitance Tolerance	±20% (at 120Hz, 20℃)																																											
Leakage Current (at 20℃)																																												
	Rated Voltage		6.3 ~ 100V					160 ~ 450V																																				
	Time		after 2 minutes					after 5 minutes																																				
	Leakage Current		I = 0.01CV or 3 (μA), whichever is greater					I = 0.04CV + 100 (μA)																																				
Where, C = rated capacitance in μF, V = rated DC working voltage in V																																												
Tanδ (at 120Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td><td>160</td><td>200</td><td>250</td><td>400</td><td>450</td></tr><tr><td>Tanδ (max)</td><td>0.30</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.13</td><td>0.12</td><td>0.09</td><td>0.08</td><td>0.07</td><td>0.15</td><td>0.15</td><td>0.15</td><td>0.20</td><td>0.20</td></tr></table>														Rated Voltage	6.3	10	16	25	35	50	63	80	100	160	200	250	400	450	Tanδ (max)	0.30	0.24	0.20	0.16	0.13	0.12	0.09	0.08	0.07	0.15	0.15	0.15	0.20	0.20
Rated Voltage	6.3	10	16	25	35	50	63	80	100	160	200	250	400	450																														
Tanδ (max)	0.30	0.24	0.20	0.16	0.13	0.12	0.09	0.08	0.07	0.15	0.15	0.15	0.20	0.20																														
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.																																											
	Rated Voltage		6.3	10	16	25	35	50	63	80	100	160	200	250	400	450																												
	Impedance Ratio	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	2	2	2	3	3	3	6	6																												
Z(-55/-40℃)/Z(+20℃)		10	7	5	3	3	3	3	3	3	6	6	6	10	-																													
Endurance																																												
	Test Time		3,000 Hrs for ϕ D ≤ 10 mm; 5,000 Hrs for ϕ D ≥ 12.5 mm																																									
	Capacitance Change		Within ±30% of initial value																																									
	Tanδ		Less than 300% of specified value																																									
	Leakage Current		Within specified value																																									
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied for 3,000 ~ 5,000 hours at 105℃.																																												
Shelf Life Test																																												
	Test Time		1,000 Hrs																																									
	Capacitance Change		Within ±30% of initial value																																									
	Tanδ		Less than 300% of specified value																																									
	Leakage Current		Within specified value																																									
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied.																																												
Ripple Current and Frequency Multipliers																																												
	Frequency (Hz)		50	120	1k	10k up																																						
	Cap.(μF)		50	120	1k	10k up																																						
	Under 1,000		0.70	1.00	1.30	1.40																																						
1,000 < C ≤ 1,500		0.85	1.00	1.13	1.15																																							

Diagram of Dimensions

Fig. 1


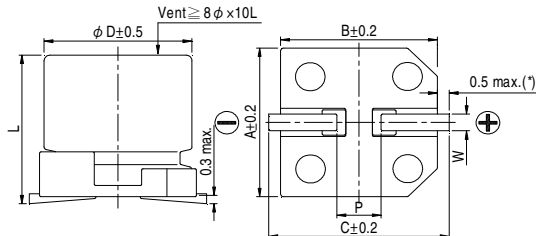


Fig. 2

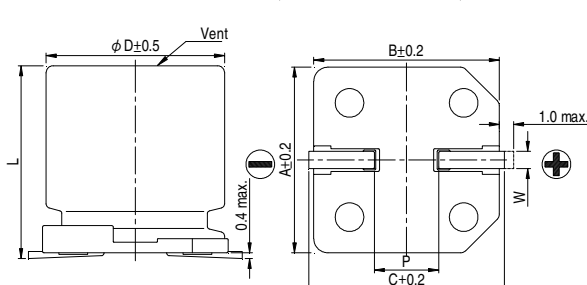

Lead Spacing and Diameter


Unit: mm

ϕD	L	A	B	C	W	P ± 0.2	Fig. No.
4	5.7 \pm 0.3	4.3	4.3	5.1	0.5 ~ 0.8	1.0	1
5	5.7 \pm 0.3	5.3	5.3	5.9	0.5 ~ 0.8	1.5	1
6.3	5.7 \pm 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
6.3	7.7 \pm 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
8	10 \pm 0.5	8.3	8.3	9.0	0.7 ~ 1.1	3.1	1
10	10 \pm 0.5	10.3	10.3	11.0	0.7 ~ 1.3	4.7	1
12.5	13.5 \pm 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
12.5	16 \pm 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
16	16.5 \pm 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
16	21.5 \pm 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2
18	16.5 \pm 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2
18	21.5 \pm 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2


(*) : For 4 ~ 6.3 ϕ is 0.4 max.

Marking


$\phi D \leq 6.3\text{mm}$



$\phi D = 8 \sim 10 \text{ mm}$



$\phi D \geq 12.5\text{mm}$



Dimension and Permissible Ripple Current

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 120 Hz, 105°C

V. DC	6.3V (0J)	10V (1A)	16V (1C)	25V (1E)	35V (1V)	50V (1H)	63V (1J)	80V (1K)
μF Contents	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA
1 010						4x5.7 8		
2.2 2R2						4x5.7 12		
3.3 3R3						4x5.7 17		
4.7 4R7					4x5.7 16	5x5.7 22		
10 100			4x5.7 18	5x5.7 27	5x5.7 27	6.3x5.7 32		
22 220	4x5.7 22	4x5.7 30	5x5.7 30	6.3x5.7 44	6.3x5.7 44	6.3x7.7 58		
33 330	5x5.7 35	5x5.7 35	6.3x5.7 48	6.3x5.7 50	6.3x7.7 57	8x10 130		
47 470	5x5.7 38	6.3x5.7 50	6.3x5.7 50	6.3x7.7 63	8x10 92	8x10 141		
100 101	6.3x5.7 69	6.3x7.7 81	6.3x7.7 81	8x10 116	10x10 151	10x10 160		12.5x13.5 220
150 151							12.5x13.5 240	12.5x16 290
220 221	6.3x7.7 120	8x10 141	8x10 141	10x10 290	10x10 320	12.5x13.5 280	12.5x16 320	16x16.5 410
330 331	8x10 141	10x10 290	10x10 290	10x10 320	12.5x13.5 320	12.5x16 360	16x16.5 450	16x16.5 510
470 471	10x10 320	10x10 320	10x10 320		12.5x16 410	16x16.5 510	16x16.5 540	18x16.5 650
1,000 102	10x10 410				16x16.5 690	18x16.5 780		
1,500 152					18x16.5 900			

V. DC	100V (2A)	160V (2C)	200V (2D)	250V (2E)	400V (2G)	450V (2W)
μF Contents	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA	$\phi D \times L$ mA
3.3 3R3						12.5x13.5 40
4.7 4R7				12.5x13.5 65	12.5x16 50	12.5x16 50
10 100			12.5x13.5 80	12.5x16 105	16x16.5 85	16x16.5 85
22 220			12.5x16 105	16x16.5 180	18x21.5 130	18x21.5 130
33 330		12.5x13.5 95	16x16.5 220	18x16.5 230		
47 470		16x16.5 260	18x16.5 270	18x21.5 280		
68 680	12.5x13.5 180	18x16.5 320	18x21.5 330			
100 101	12.5x16 240	16x21.5 380				
150 151	16x16.5 340					
220 221	16x16.5 410					
330 331	18x16.5 540					

Part Numbering System

VEU Series	470 μF	$\pm 20\%$	6.3V	Carrier Tape	10 $\phi \times 10L$	Pb-free and PET coating case
VEU	471	M	0J	TR	-	1010
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size
						Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lelon:

<u>VEU100M1ETR0506</u>	<u>VEU101M0JTR0606</u>	<u>VEU101M1ATR0607</u>	<u>VEU101M1CTR0607</u>	<u>VEU101M1ETR0810</u>
<u>VEU101M1KTR1313</u>	<u>VEU101M1VTR1010</u>	<u>VEU102M0JTR1010</u>	<u>VEU102M1HTR1816</u>	<u>VEU102M1VTR1616</u>
<u>VEU151M1JTR1313</u>	<u>VEU152M1VTR1816</u>	<u>VEU220M0JTR0406</u>	<u>VEU220M1ATR0406</u>	<u>VEU220M1ETR0606</u>
<u>VEU220M1HTR0607</u>	<u>VEU221M1ATR0810</u>	<u>VEU221M1CTR0810</u>	<u>VEU221M1ETR1010</u>	<u>VEU221M1HTR1313</u>
<u>VEU221M1JTR1316</u>	<u>VEU221M1VTR1010</u>	<u>VEU2R2M1HTR0406</u>	<u>VEU330M0JTR0506</u>	<u>VEU330M1CTR0606</u>
<u>VEU330M1ETR0606</u>	<u>VEU330M1VTR0607</u>	<u>VEU331M1ATR1010</u>	<u>VEU331M1CTR1010</u>	<u>VEU331M1ETR1010</u>
<u>VEU331M1HTR1316</u>	<u>VEU331M1JTR1616</u>	<u>VEU331M1VTR1313</u>	<u>VEU3R3M1HTR0406</u>	<u>VEU470M1HTR0810</u>
<u>VEU470M1VTR0810</u>	<u>VEU471M0JTR1010</u>	<u>VEU471M1CTR1010</u>	<u>VEU471M1HTR1616</u>	<u>VEU471M1JTR1816</u>
<u>VEU471M1VTR1316</u>	<u>VEU4R7M1HTR0506</u>	<u>VEU4R7M1VTR0406</u>	<u>VEU101M2ATR1316</u>	<u>VEU151M1KTR1316</u>
<u>VEU151M2ATR1616</u>	<u>VEU221M1KTR1616</u>	<u>VEU221M2ATR1616</u>	<u>VEU331M1KTR1616</u>	<u>VEU331M2ATR1816</u>
<u>VEU471M1KTR1816</u>	<u>VEU680M2ATR1313</u>	<u>VEU331M0JTR-0607</u>		