


N = Number of contacts

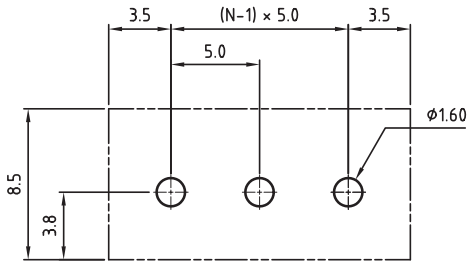

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL  
INSULATOR: PBT  
FLAMABILITY RATING: UL94-V0  
COLOR: GREEN  
CONTACT: BRASS  
SOLDER TAIL PLATING: TIN

ENVIRONMENTAL  
OPERATING TEMPERATURE: -40 UP TO 105°C  
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	cULus	VDE
CURRENT RATING:	20A	20A
WORKING VOLTAGE:	300VAC	300VAC
WITHSTANDING VOLTAGE:	1.6KV	2.5KV
CONTACT RESISTANCE: □	20 mOhm max	

MECHANICAL  
PITCH: 5.00MM



SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 3117

CERTIFICATION



RoHS Compliant									
G				PROJECTION: 	GENERAL TOLERANCE  .X = $\pm$ 0.2 .XX = $\pm$ 0.15				
F									
E									
D									
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: SERIE 3117 - 5.00MM CLOSE VERTICAL PCB HEADER WR-TBL			SIZE  <b>A4</b>
B					SCALE:				
A	04-NOV-08	PDF	JP		SHEET: 1/1	WERI PART NO: 691 311 700 1xx			
REV	DATE	FILE	BY		DRAW: MARVIN				

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[691311700102](#)